

# THE HEATING CONTROL SYSTEM SELECTED FOR THE U.S. SUMMER OLYMPICS



## ASSURES UNSURPASSED PERFORMANCE FROM *YOUR* SOLAR-HEATED POOL!

Efficient, economical, environmentally friendly solar energy, coupled with proven precision and reliability of the Helio-Matic® Control System – was the heating system selected for the pools at the recent U.S. Summer Olympic Games in Atlanta.

This same winning combination can insure that your pool's solar heating operates at peak efficiency – easily, automatically, and oh, so enjoyably!

Not only will your pool water be warm and comfortable every time you dip a toe, this Olympic-level system is designed to extend your enjoyment of the entire swimming season by providing warm water even under less than ideal weather conditions.

Proven in thousands of installations, both residential and commercial, Heliotrope's reputation

for and insistence on *quality*, down to the smallest system component, has resulted in unprecedented user satisfaction for over a quarter of a century.

Make the most of your pool's solar heating system. Make the choice of U.S. Olympic engineers – The Helio-Matic® Control System from Heliotrope, for years of unsurpassed swimming pleasure.


And no one is more deserving of the best than you. By choosing solar heating for your pool, you are showing your concerns for our earth's resources, now, and for generations to come. Thank you.

Heliotrope Pool



# Among the reasons the Helio-Matic® Controller was chosen for the U.S. Summer Olympics was ease of operation.

Basically, it's as simple as setting a thermostat. Simply set the desired water temperature on the Helio-Matic® Electronic Controller. Two precision sensors, one for the pool water, and one simulating the solar collector, signal the controller when climate conditions are right for the water to be heated. If the water temperature is not above the desired setting, the controller opens the Flo-Verter® Valve, sending water through the solar collectors, gathering warmth and returning to the pool. When the desired temperature is reached, the controller automatically closes the operating valve.

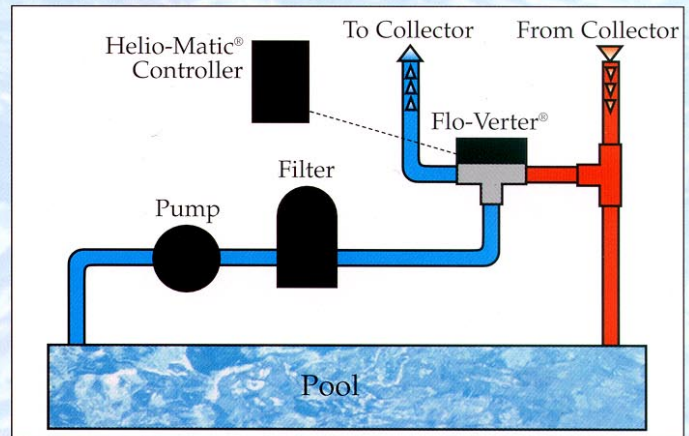

## The "Mind and Muscle" of the Olympic Control System:

### Helio-Matic® Electronic Controller

- Valve output for 12 or 24 VAC valve without any need for adjustment.
- Color-coded wire terminals to match Flo-Verter® wire colors.
- Ample interior wiring space without need to access electronics.
- Calibrated control knob for precise maximum temperature.
- Brass material sensor for pool water temperature.
- Aluminum block sensor for collector simulation. Does not need to be mounted on the collectors.
- Lightning arc absorbers for sensors.
- HM 5000 model for pump control and/or valve plus pump delay to protect pool sweep motor. Delay may be disabled.
- Extra UV protection enclosure for longer-lasting like-new appearance.



### Flo-Verter® Valve

- Mounts in any position except upside-down.
- Twin o-rings on shaft to outlast single o-rings.
- Low-profile design, with two synchronous motors.
- Uses either 12 or 24 VAC input without need for adjustment.
- Water flows through curved and fluted diverter for less pressure drop. Equivalent to one 90° L.
- Valve and actuator together, require no assembly.
- Actuator easily replaced.
- Simple handle for manual control.
- Non-positive seal, for freeze-protection draining.
- Pre-wired with color-coded wires for fast and easy hook-up to controller.

### WARRANTY

Both the Helio-Matic® Controller and the Flo-Verter® Valve are unconditionally guaranteed for one year from date of installation.

A special arrangement with installing dealers provides for rapid replacement in case of failure.

### ORDERING INFORMATION, Prices effective 7-1-2000

HM4000C – Helio-Matic® Controller with sensors. For 24 VAC valve. (120 or 240V input).....	\$305.00
HM5000C – Helio-Matic® Controller with sensors. For 1-HP at 240 volt or 3/4-HP at 120 volt pump and/or 24 VAC valve.....	\$390.00
FV– 2.0 Flo-Verter® 2" valve, operated by either 12 or 24 VAC.....	\$255.00
COMBO – Helio-Matic® Controller, sensors and Flo-Verter® FV– 2.0 Valve.....	\$575.00
POOL WATER SENSOR – Drill 5/16" hole into pipe. Complete with stainless steel clamp (IS 1.0).....	\$ 27.00

COLLECTOR SENSOR – Aluminum block (AS-2-10).....	\$ 27.00
OTHER SENSORS– 1/4" pipe thread. Alternate to the IS 1.0 (BP-25-10). Use in place of 1/4" plug in basket strainer housing.....	\$ 27.00
1/2" thread (BP-50-10).....	\$ 27.00

### Heliotrope Pool

1155 Barrett Lake Road  
Dulzura, CA 91917-1504  
Phone/Fax (619) 468-3875

